
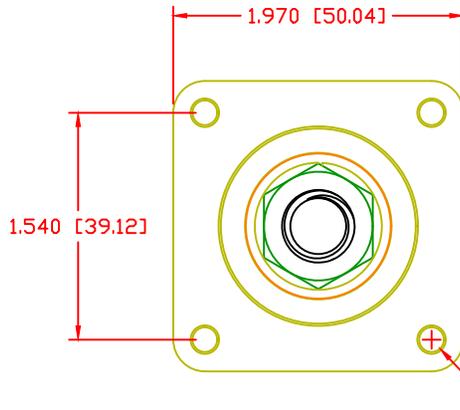


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.


LTR.	REVISIONS	DATE	INT.

USE GREENLEE PUNCH
ASSEMBLY #60098
FOR PANEL CUTOUT

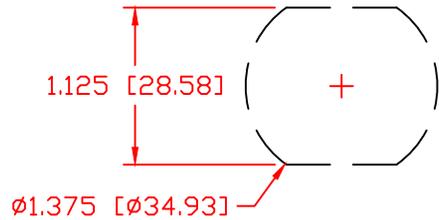


ASSEMBLY
CCFB506N0N05W
CONSIST OF :

- 1-CCFB506N0N05
POWER BUSHING
- 1-3960-002
SEALING GASKET
- 1-232N3V05
INSULATOR BOOT

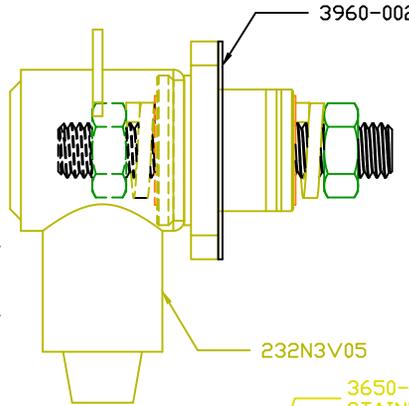


P/N 3960-002
.062 THICK CF 4480 81 DURUMETER
FIBERGLASS REINFORCED SILICONE
PRESS PAD SEALING GASKET



3850-001 1/2"-13
STAINLESS STEEL
JAM NUT (2) REQ'D

3650-000 LOCK WASHER
STAINLESS STEEL (2) REQ'D

3742-015
NICKEL PLATED
MOUNTING STUD

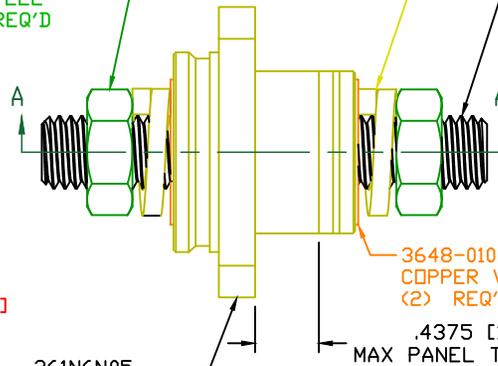


361N6N05
GLASS FILLED
NYLON BUSHING

.4375 [11.11]
MAX PANEL THICKNESS

3648-010
COPPER WASHER
(2) REQ'D

3863-003
COPPER CORE

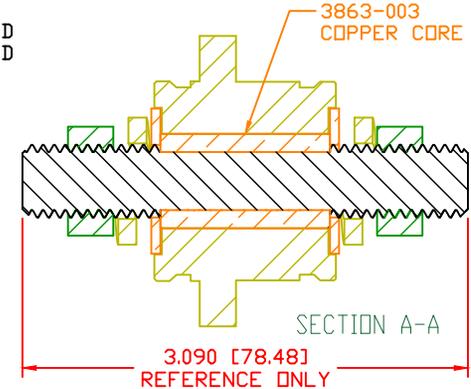

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
HARDWARE ITEMS: ±.010" [±0.25mm]

MAXIMUM FASTENER TORQUES:
JAM NUTS: 198 IN-LBS [22.30 Nm]

CURRENT CARRYING CAPACITY:
DUTY CYCLE: 80%
CURRENT CAPACITY: 5.2 Kw (440 AMP @ 12VDC)
TEMPORARY MAX (12 MINUTES) 6.6 Kw (550 AMP @ 12VDC)

MATERIAL PART NO: 7111210505
MATERIAL: GLASS FILLED NYLON
VENDOR PART NO: NYLON N2015 HL NAT
SPECIFIC GRAVITY: 1.23
MELTING TEMP: 515 F [268 C]
U.L. RATING: UL 94 HB

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: CUSTOMER DIMS	DATE: 11-16-17
TITLE: 1/2" PANEL MOUNT POWER BUSHING, COPPER CORE		CHK'D BY: PJK	
MATERIAL: GLASS FILLED NYLON		PART NO: CCFB506N05W	
COLOR: YELLOW	DRG CLASS		